


# 42

## Aft Cabin Motor Yacht

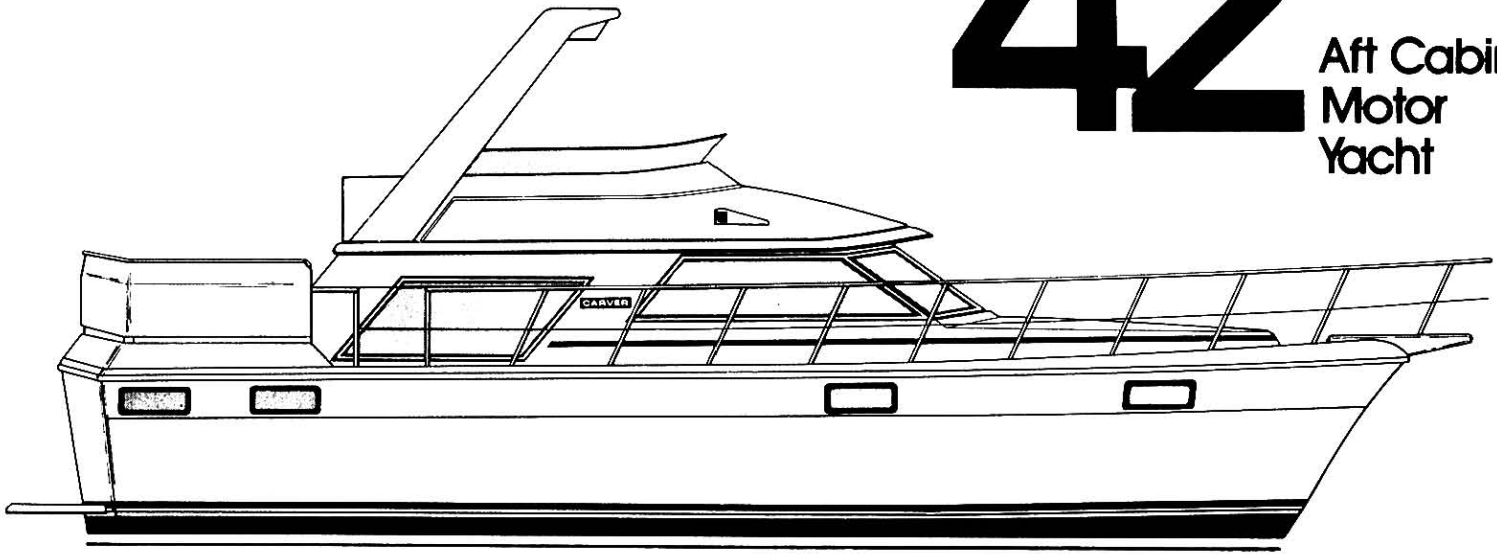


The Carver 42 Aft Cabin Motor Yacht features two large private staterooms. The owner's stateroom (aft) has a queen-size berth, two full hanging lockers and private head compartment with shower. Forward, the roomy guest stateroom offers a large, comfortable berth and access to the forward head

compartment. The salon is equipped with wet bar, entertainment center, L-shaped sofa and breakfast bar. Topside, the command bridge provides seating for seven, arranged fore and aft of the walk-around command console. The 42 Aft Cabin is the perfect yacht for extended cruising.

### SPECIFICATIONS

|                      |            |
|----------------------|------------|
| LOH                  | 42'0"      |
| Standard LOA         | 48'1"      |
| Maximum LOA          | 48'1"      |
| Beam                 | 15'0"      |
| Draft                | 42"        |
| Bridge Clearance     | 13'0"      |
| With Optional Arch   | 16'6"      |
| Deadrise at Transom  | 10°        |
| Dry Weight (approx.) | 23,600 lb. |
| Cabin Headroom       | 6'7"       |
| Sleeping Capacity    | 7          |
| Fuel System Capacity | 400 gal.   |
| Water System         | 170 gal.   |
| Waste Capacity       | 80 gal.    |

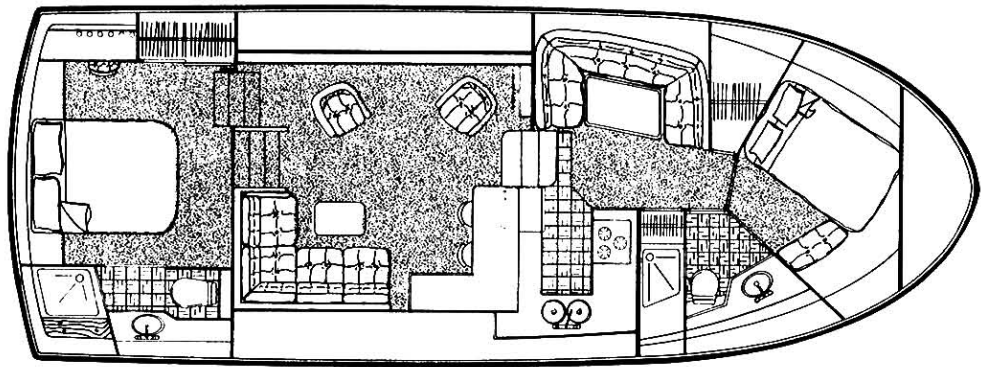

### UNDERWATER GEAR

|                  |                              |
|------------------|------------------------------|
| Propeller Shafts | 1 3/4" dia SS                |
| Rudders          | Bronze with 1 1/2" SS shafts |
| Struts (2/shaft) | Heavy-duty bronze V-struts   |

# Carver 42 Aft Cabin Motor Yacht

## STANDARD EQUIPMENT

### Exterior

Bottom paint, anti fouling  
Welded SS bow, aft deck, bridge rails  
SS deck hardware, including three 12" bow cleats, four 12" springline cleats and two 10" aft decking mooring bits  
Command bridge includes control, venturi windshield, bridge seating, electronics locker, and storage  
Electronics arch  
Teleflex console instrumentation includes backlighted fuel and oil pressure gauges, tachometer, voltmeter and temperature gauges, and engine hour meters  
Aft deck fiberglass weather protector  
Fully weather-sealed deck hatch includes screens  
International code navigation lights (NMMA approved)  
Anti skid fiberglass decks  
Fiberglass swim platform with ladder  
Fiberglass bow pulpit  
Sun pad cover  
Windshield covers  
Heavy duty gunwale molding  
Bridge helm and seat covers

### Propulsion

Twin inboard gas  
454 CID Crusader  
7.4L MerCruiser  
502 CID Crusader  
AQ740 Volvo  
Twin inboard diesel  
3208TA Caterpillar  
TAMD 71 Volvo

### Design

The Carver 42 hull planes easily and exhibits exceptional tracking ability. The fine entry, three-quarter length keel, innovative shape of the running bottom and the location of the center of gravity all contribute to the superior performance. The planing surface of the hull has parallel buttocks and slopes up as it runs aft. The wide chines, however, are parallel to the waterline. This causes the chines to widen significantly as they run aft. The chines, which measure two feet wide at the transom, provide the extra amount of initial stability so evident upon boarding the boat. To eliminate bow spray, a second chine was designed into the hull to deflect the bow wave out.

### Construction

Hull construction begins with a fully cured gel coat of 18 mil. thickness. Hand layup method of construction guarantees the proper fiberglass to resin ratio, assuring consistent laminate strength throughout. The hull is made up of several carefully applied layers of 1/2 oz. random strand mat and 24 oz. woven roving fiber glass. Generous overlap of these layers in the keel and chines increases hull strength, impact resistance and overall structural integrity.

The stringer system is 100% fiberglass, reinforced in the engine room with aluminum. The stringer system is a one piece grid network bonded to the solid fiberglass hull bottom. Forward and aft fiberglass hull liners are bonded to the hull and stringers. The hull sides have a balsa core above the waterline for additional stiffness. The resulting structure is incredibly strong with a minimum of weight. Superstructure and deck surfaces are fiberglass-reinforced with 3/4" end grain balsa; and 1/4" aluminum plates are used in areas of hardware

construction. The deck is firmly secured to the hull by fiberglass adhesive and SS screws, and sealed by a heavy gunwale molding. Every Carver boat is thoroughly inspected at each step of the construction process to guarantee it meets our demanding high-quality standards.

### Galley and Head Compartments

Pressurized 170 gal. hot/cold water system  
20 gal. water heater  
3-burner stove with overhead microwave/convection oven  
General Electric refrigerator/freezer  
Double round SS sinks in galley  
More than 16 sq. ft. useable counter space in galley  
Convenient vanity with SS sinks, pressure water, mirrors and storage  
Forced air exhaust ventilation  
Two fiberglass stall showers with bi fold doors  
Two Raritan crown electric heads with twin 40 gal. holding tanks  
Engine heat exchanger

### Functional/Safety

Galvanic isolator  
Windows, lightly tinted, with screens  
Three automatic, electric bilge pumps  
Gravity bilge ventilation  
Deluxe dual trumpet air horn  
Bennett electric hydraulic trim tabs  
Fireboy Halon fire extinguisher system  
Carbon monoxide monitoring system

### Electrical

Four heavy-duty batteries with cold-cranking amperage of 530 each (reserve capacity 172 minutes)  
Battery charging system  
Dockside wiring, 50 amp, 120 VAC with a 50 ft. shore cable  
Cabin lighting, 12V + 120V  
9.0 KW Kohler gas or 8.0 KW Kohler diesel generator  
Courtesy lights located on bridge, aft deck and cabin entry steps

### Interior

Aft stateroom with queen size berth  
77" x 56" berth  
79" headroom  
70.1 cu. ft. total storage  
11'0" x 10'5" salon with chair, hi lo table and L-shaped sofa bed  
Sofa converts to a 67" x 38" berth  
Salon wet bar  
57" x 30" breakfast bar with seating  
44.8 cu. ft. total storage space in forward stateroom  
Color coordinated carpeting, draperies and upholstery  
Plush, stain and soil resistant 100% nylon carpeting  
Fully lined 100% cotton drapes protected by Scotchguard  
Convertible dinette  
Mini blinds

## OPTIONAL EQUIPMENT

### Helm Equipment

Lower station helm and controls  
Engine synchronizers  
7" spotlights electric remote control  
Cigar lighter  
Compass

### Galley and Interior

Salon chair, additional

Washer/dryer  
Trash compactor  
Ice maker with glass storage  
Blender  
Shore water adaptor  
Maxxima or Kenwood cassette stereo with AM/FM receiver  
Air conditioning with reverse cycle heat  
13" color TV with remote  
Wiring and jack for TV and telephone  
Decorator pillows  
Central vacuum system  
V-berth table  
Water tank monitor gauge  
Linen package

### Weather Covers

Complete bridge canvas enclosure

### Electrical

Dual-dockside, 120V 50A  
50 amp dockside adaptors  
12.0 KW Kohler gas or 12.5 KW Kohler diesel generator

### Exterior

Aft deck hardtop  
Electric windlass  
4 lb. fire extinguisher  
Wet bar  
Ice maker  
Refrigerator  
Fender racks  
Bridge and aft deck carpeting  
Cockpit pressure washdown

### Propulsion

Engine fresh water cooling  
Internal and external sea water strainers  
Fuel selector valves

### Functional/Safety

Sail away package  
Ships bell  
Life ring  
Distress signal kit  
Fire extinguishers (2)  
Fenders (4 10")  
Life jackets (8)  
Dock lines (6)

For more information on the majestic 42 Aft Cabin, see your Carver dealer. We also invite you to visit our production facilities in Pulaski, WI. Call toll free 800/558 8190. (Wisconsin 800 242 4546; Canada 800 351 0644)

Information accurate at time of printing. Carver Boat Corporation reserves the right to change without notice: price, color, materials, equipment specifications or models. Models may also be discontinued without obligation to previous purchasers. All Carver yachts and cruisers carry a limited warranty. See your dealer for current specifications.

# CARVER

Carver Boat Corporation  
Industrial Drive  
Pulaski, Wisconsin 54162-1010  
414/822-3214

POWER BY

