


3 8 0


S A N T E G O

S E

**CARVER**<sup>®</sup>  
YACHTS

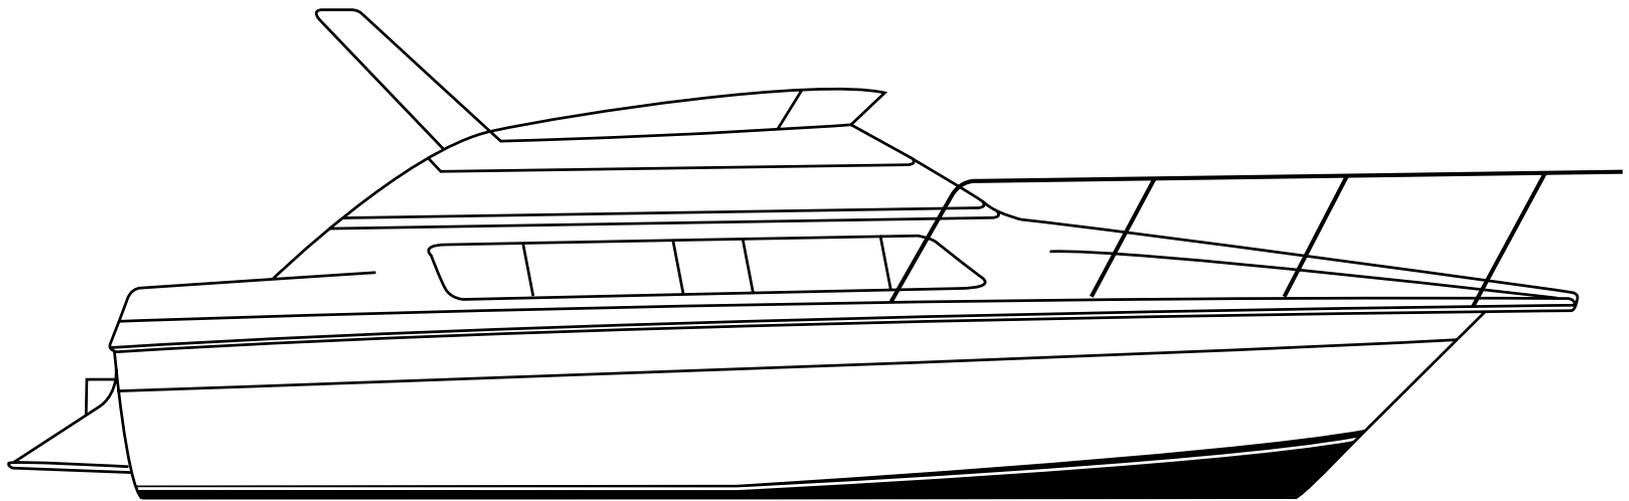

# 3 8 0 S A N T E G O S E

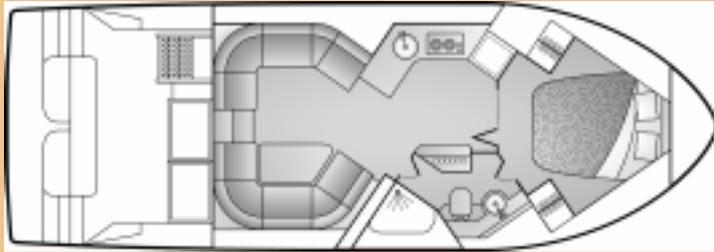

LOA (w/platform)	41'8"	12,70 m
Beam	13'2"	4,01 m
Draft	40"	1,02 m
Bridge Clearance w/arch	14'8"	4,47 m
Weight (w/fuel & water)	19,300 lbs.	8754,48 kg
Water System	90 U.S. gals.	340,69 liters
Waste System	37 U.S. gals.	140,06 liters
Fuel System	216 U.S. gals.	817,65 liters
Twin V-drive inboards (gas or diesel)		
Cabin Headroom	6'4"	1,93 m
Sleeps	4 (6 optional)	

## STANDARD FEATURES

### CONSTRUCTION

- Structural engine mountings - reinforced stringer mountings with gusseted, angle steel plates
- Hand-laid, molded fiberglass components featuring composite laminate hullsides, decks, and cabintops
- Molded fiberglass stringer system
- Cherry wood cabinetry and trim throughout cabin, with high glass finish
- Solid fiberglass hull bottoms with Knytex substrates and Vinylester barrier coat
- Tinted, tempered safety glass frameless window systems
- Unitized deck and cabintop construction

### MECHANICAL

- Air conditioning system - reverse heat cycle, 2 units, 23,000 BTU total
- Dripless shaft logs
- Exhaust mufflers - engines
- Fuel tanks - welded, baffled 5052 aluminum

- Hydraulic steering
- Propellers
- Propeller shafts - aquamet
- Rudders - 421 manganese bronze
- Seawater cooling - engines
- Cutlass bearings - synthetic rubber composite
- Struts - 421 manganese bronze
- Trim tabs - stainless steel, hydraulic

### ELECTRICAL

- AC/DC distribution panels with magnetic circuit breakers and integral bilge blower controls; AC and DC voltmeters; AC and DC ammeters
- Batteries (2) - deep cycle, marine (12V)
- Battery charger - electronic, AC-DC converter
- External connectors - CATV, telephone
- Ground Fault Circuit Interrupt (GFCI) protection - all 110V outlets
- Shore power connectors (2) - 30 amp
- Shore power cards (2) - 50 ft.
- Wiring system - tinned copper strand wire, harnessed, color-coded, labeled, meets or exceeds ABYC standards

### WATER & WASTE SYSTEMS

- Fresh water system - pressurized (12V)
- Fresh water storage tanks (2) - polyethylene, 45 gallons each
- Shore water connection with pressure-reduction valve
- Shower sump pump - automatic operation
- Water and waste lines - constructed of molecularly cross-linked polyethylene
- Waste holding tank - with dockside pumpout, 37 gallons
- Water heater - 11 gallons (110V)

### SAFETY & NAVIGATION

- Anodes - zinc, sacrificial
- Battery selector switch
- Battery restraint boxes and straps
- Bilge blowers - (12V)
- Bilge pumps (2) - 1500 gph each, automatic/manual operation
- Brass valves for all underwater thru-hulls
- CO detector in salon and stateroom
- Compass - illuminated

- Engine alarms - temperature and oil pressure
- Fire suppression system - automatic, FE241 (FM200 in European Community)
- Galvanic isolator/zinc saver
- Horn - air/electric (12V), trumpet
- Internal bonding system
- Molded nonskid surfaces on all walk decks
- Navigation lights (COLREGS)

### BRIDGE

#### Command Bridge

- Access panels (2) - behind forward lounge, provide access to helm wiring
- Canvas - full, black Sunbrella
- Carpet - outdoor
- Electronics arch - custom aluminum with acrylic polyurethane surface coating and UV protection
- Electronics arch access plates (3) - corrosion-resistant polymer attached with noncorroding screws and waterproof sealant
- Lights (3) - courtesy, recessed
- Lockers (2) - forward bulkhead
- Lounge - forward, double-wide

- Lounge - port side, accommodates 3 adults, storage beneath
- Lounge - starboard side, accommodates 3 adult, storage beneath
- Self-draining walk surface
- Stereo speakers (2)
- Windshield - venturi-style, wraparound aluminum frame

#### Fore Deck Companionway

- Access from center of command bridge to foredeck
- Grab rails (2) - 28" stainless steel, on either side of companionway
- Lights (2) - courtesy, recessed

#### Helm

- Access panels (2) - below helm, provide access to helm wiring
- Adapter - 12V
- Beverage holders (2) - recessed, self-draining
- Carpet - exterior
- Companion seat - double wide
- Helm seat - adjustable, double-wide, high-quality marine-grade upholstery, embroidery stitching
- Tilt steering wheel

#### Instrumentation

- Gauges - synchronizer, fuel level
- Gauges (1 set per engine) - oil pressure, engine temperature, engine battery voltage, engine hourmeter, tachometer
- Toggle switch controls

## DECK

#### Side Decks

- Cleats (4) - 10" spring, stainless steel, through-bolted through aluminum backing plate
- Grab rails (2) - 132" stainless steel, above cabin windows
- Rub rail molding - heavy-duty, stainless steel insert

#### Fore Deck

- Bow rail - 1.0" O.D., lineal-buffed, welded stainless steel, with additional intermediate rail forward
- Bow rail stanchions - double-welded (inside and outside), stainless steel, anchored to aluminum backing plates laminated into deck
- Cleat - 12" stainless steel for anchor line, through-bolted through aluminum backing plate

- Cleats (2) - 12" stainless steel, through-bolted through aluminum backing plate
- Pulpit with anchor roller and stainless steel hawse pipe

## COCKPIT

- 43 ft<sup>2</sup> (approx.), integral to hull and deck
- 110V outlet - GFCI protected
- Carpet - exterior
- Cleats (2) - 12" stainless steel, through-bolted through aluminum backing plate
- Command bridge ladder - stainless steel rails, stainless steel-reinforced vinyl rungs with nonskid surface
- DC distribution panel - 12V safety systems
- Grab rails (2) - 26" stainless steel, on side deck stairways
- Hatches (3) - engine room access, 57" x 30.5", guttered
- Lights (2) - courtesy, recessed, with exterior-mounted switch
- Lockers (2) - outboard, self-draining, for stowing shore power lines
- Safety cables (2) - at top of each cockpit stairway
- Side deck stairways (2) - integral to deck

## ENGINE ROOM

- Bilges coated with white, low-VOC gelcoat
- Insulation - acoustical and thermal, vinyl vapor barrier
- Light

## BOARDING PLATFORM

- 19 ft<sup>2</sup> (approx.)
- Boarding ladder - retractable, telescoping, concealed under boarding platform, with grab rail mounted on boarding platform
- Cockpit stairways (2) - integral
- Fuel fittings - port and starboard transom
- Hand rails (2) - stainless steel, one for each cockpit stairway
- Lockers (2) - transom, self-draining

## SALON / DINETTE

- 110V outlets (2) - GFCI protected
- AC and DC distribution panels
- Carpet - beige, tufted cut pile, 65 oz., crush-resistant, 100% nylon
- Designer décor
- Designer curtains - décor-matched

- Designer privacy curtain - décor-matched, self-storing, closes across dinette lounge
- Entertainment group - TV/VCR and 12V stereo including AM/FM receiver, single CD player, and 2 speakers each in salon/dinette, stateroom, and on command bridge
- Entrance door - tinted glass in aluminum frame, sliding, handle lock, also secures open, with interior screen
- Lights (7) - halogen, overhead, recessed
- Lounges (2) - U-shaped, neutral Romantica, dinette lounge converts to berth
- Miniblinds - décor-matched
- Mirrored bulkhead - forward starboard side
- Padded bulkheads
- Rocker light switch
- Rotary dimmer light switches (2) - for lights over lounges
- Storage - beneath and behind lounges
- Table - 43.5" x 18.5", trapezoidal, with raised edge
- Telephone connector

## GALLEY

- 110V outlets (4) - GFCI protected
- Carpet - beige, tufted cut pile, 65 oz., crush-resistant, 100% nylon
- Chrome sink fixtures
- Coffee maker
- Designer décor
- Lights (3) - halogen, overhead, recessed
- Microwave oven - built-in, turntable
- Miniblinds - décor-matched
- Padded bulkheads
- Range - electric, 2-burner, ceran top
- Refrigerator/freezer (upright)
- Rocker light switch
- Sink - stainless steel
- Storage - under sink
- Storage drawers
- Storage cabinets
- Wet bar - self-draining with sink, water dispenser, bottle and glass storage

## STATEROOM

- 110V outlets (2) - GFCI protected
- Access panel - anchor chain locker
- Bedside countertops

- Berth - double, island
- Bolster - padded, on sides of berth
- Carpet - beige, tufted cut pile, 65 oz., crush-resistant, 100% nylon
- CATV connector
- Designer décor
- Entrance door - bi-fold, secures open and closed, stainless steel hardware
- Hanging lockers (2) - 20.5" and 14.5" hanging bars, automatic light
- Lights (2) - directable reading, recessed
- Lights (2) - halogen, overhead, recessed
- Overhead hatch - 20" x 20", lockable, inside screen, over berth
- Padded bulkheads
- Rocker light switch
- Stereo speakers (2) - with wall-mounted rotary volume control
- Storage - beneath berth
- Storage drawers (4) - in foot of berth
- Telephone connector

## HEAD

- 110V outlet - GFCI protected
- Chrome sink fixtures
- Designer curtains - décor-matched
- Entrance doors (2) - one to stateroom and one to salon/dinette, secure open and closed, stainless steel hardware
- Head fan
- Light - overhead, recessed
- Medicine cabinet - 2 mirrored doors, 2 shelves
- Rocker light switches
- Toilet - electric flush, pedestal
- Toilet paper holder - mounted inside vanity
- Towel bars (2) - 18"
- Vanity - laminate surface, stainless steel sink, 2 doors and storage below

#### Shower Stall

- Designer curtains - décor-matched
- Entrance door - acrylic in aluminum frame, full-length hinge, secures closed
- Integral seat
- Light - overhead, recessed
- Shower accessories shelf - integral, self-draining
- Shower head - detachable for use as a hand shower

## OWNER PREFERENCE ITEMS

### PROPULSION

- Fresh water cooling (available only with gasoline engines)

#### Gasoline Engines

- MerCruiser 7.4L MPI
- MerCruiser 454 Mag MPI Horizon
- MerCruiser 8.1 S Horizon
- MerCruiser MX 6.2 MPI
- Volvo 5.7GX
- Volvo 7.4Gi
- Volvo 7.4Gi Platinum
- Volvo 8.1Gi

#### Diesel Engines

- Cummins 330B
- Volvo TAMD 63P

### MECHANICAL

- Engine oil change system
- Internal seawater strainers

### ELECTRICAL

#### Generator

- Kohler 7.3 kW - gasoline
- Onan 9.0 kW - diesel

#### 30 Amp Shore Power Adaptor

- 1 adaptor
- 2 adaptors

### WATER & WASTE SYSTEMS

- After tank overboard discharge with pump
- Fresh water tank level monitor
- Grey water holding system
- Hot and cold cockpit handshower
- Waste tank level monitor

#### Cockpit Washdown

- Both fresh and seawater
- Fresh water
- Seawater

#### Head

- Electric flush - fresh water
- Vacuum flush

### SAFETY & NAVIGATION

- Maxwell Freedom 800 windlass with capstan, 35 lb. anchor, and 150 ft. of 5/16" chain
- Portable fire extinguisher
- Rudder angle indicator
- Single station spotlight

#### Spare Propellers and Shaft

- For gasoline engines
- For diesel engines

### EXTERIOR AMENITIES

- Bridge helm and seat covers
- Foredeck sunpad

### CABIN AMENITIES - SALON

- Coordinated Romantica color
- Décor package - 8 piece decorator pillow set, embroidered sheets and towels
- Filler cushion for port salon lounge
- Maple wood interior with high gloss finish
- Pillow set - decorator, 6-piece
- Stereo - standard + remote-mounted 6 disc CD player
- Table - for port salon, with cushion

#### Décor

- Pacific Sky
- Emerald Seafoam
- Sandstone Sculptures

### CABIN AMENITIES - GALLEY

- Icemaker

### MISCELLANEOUS

- Shipping cradle
- Shrink wrap
- Loading charge

**CARVER**<sup>®</sup>  
YACHTS

Carver Boat Corporation • P. O. Box 1010 • Pulaski, WI 54162-1010 • 920-822-3214  
www.carveryachts.com

Carver Boat Corporation reserves the right to change price, colors, materials, equipment specifications or models without notice. Models may be discontinued without obligation to previous purchasers. Illustrations may include optional equipment. Some electrical equipment is only offered in 125V/60Hz; check with your Carver dealer for availability outside the U.S.