





350 MARINER



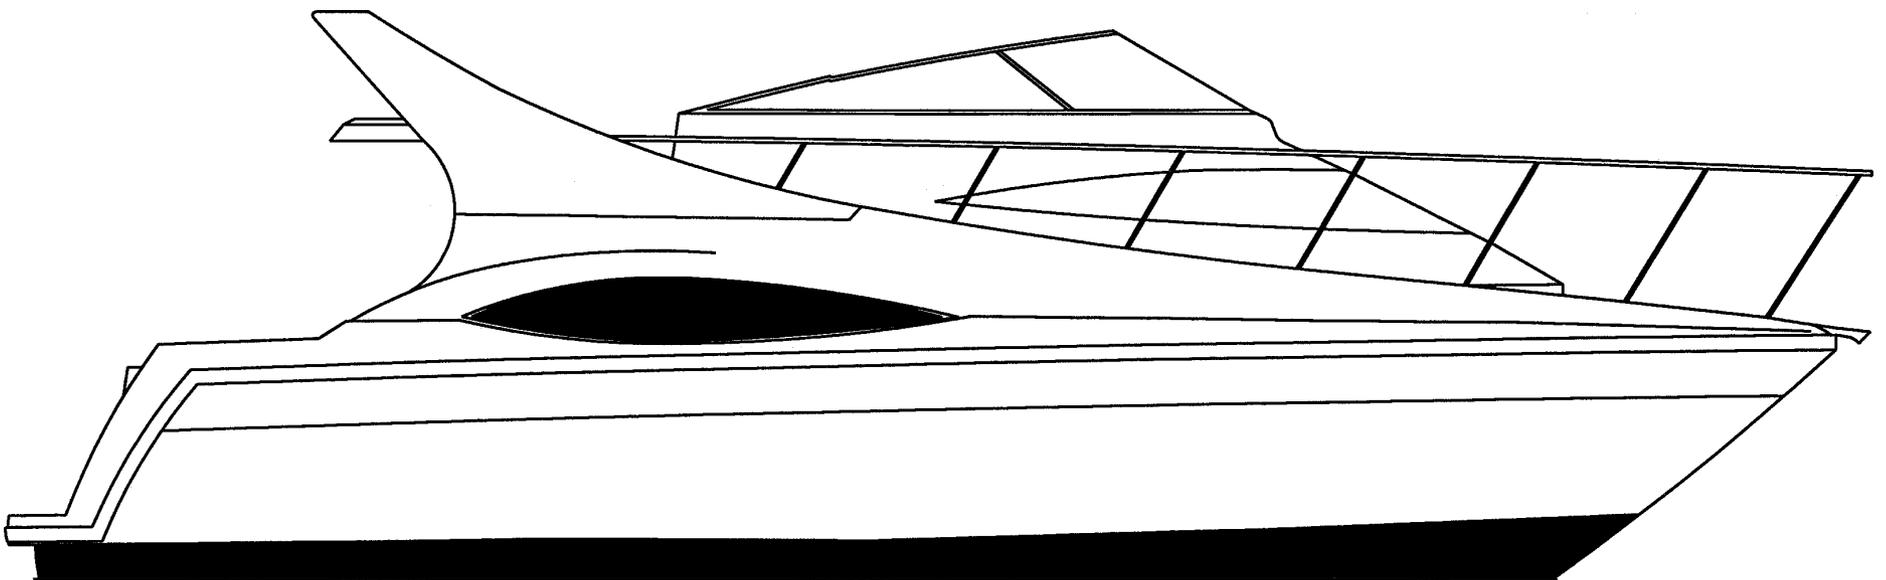

350 MARINER

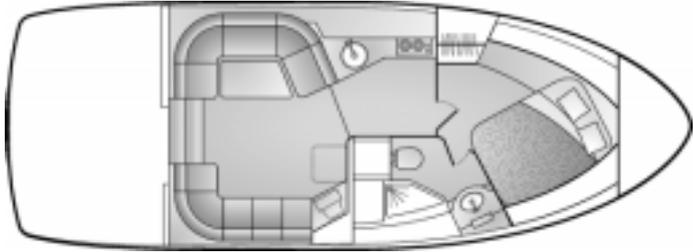

| | | |
|---------------------------------------|----------------|---------------|
| LOA (w/platform) | 36'7" | 11,15 m |
| Beam | 12'9" | 3,89 m |
| Draft | 37" | 0,94 m |
| Bridge Clearance w/arch | 14'2" | 4,32 m |
| Weight (w/fuel & water) | 18,800 lbs. | 8527,68 kg |
| Water System | 75 U.S. gals. | 283,91 liters |
| Waste System | 20 U.S. gals. | 75,71 liters |
| Fuel System | 246 U.S. gals. | 931,21 liters |
| Twin V-drive inboards (gas or diesel) | | |
| Cabin Headroom | 6'3" | 1,91 m |
| Sleeps | 4 (6 optional) | |

STANDARD FEATURES

CONSTRUCTION

- Structural engine mountings - reinforced stringer mountings with gusseted, angle steel plates
- Hand-laid, molded fiberglass components featuring composite laminate hullsides, decks, and cabintops
- Molded fiberglass stringer system
- Cherry wood bulkheads, cabinetry, and trim throughout cabin, with high-gloss finish
- Solid fiberglass hull bottoms with Knytex substrates and Vinylester barrier coat
- Tinted, tempered safety glass frameless window systems
- Unitized deck and cabintop construction

MECHANICAL

- Dripless shaft logs
- Exhaust mufflers - engines

- Fuel tanks - welded, baffled 5052 aluminum
- Hydraulic steering
- Propellers - manufacturer-certified
- Propeller shafts - aquamet
- Rudders - 421 manganese bronze
- Seawater cooling - engines
- Cutlass bearings - synthetic rubber composite
- Struts - 421 manganese bronze
- Trim tabs - stainless steel, hydraulic

ELECTRICAL

- AC/DC distribution panels with magnetic circuit breakers and integral bilge blower controls; AC voltmeter; AC ammeter
- Batteries (2) - deep cycle, marine (12V)
- Battery charger - electronic, AC-DC converter
- External connectors - CATV, telephone
- Ground Fault Circuit Interrupt (GFCI) protection - all 110V outlets
- Shore power connector - 30 amp

- Shore power cord - 50 ft.
- Wiring system - stranded, tinned copper, harnessed, color-coded, labeled, meets or exceeds ABYC standards

WATER & WASTE SYSTEMS

- Fresh water system - pressurized (12V), with large-capacity filter
- Fresh water storage tank - polyethylene
- Shore water connection with pressure-reduction valve
- Shower sump pump - automatic operation
- Water and waste lines - constructed of molecularly cross-linked polyethylene
- Waste holding tank - with dockside pumpout
- Water heater - 11 gallons (110V)

SAFETY & NAVIGATION

- Anodes - zinc, sacrificial
- Battery selector switch
- Battery restraint brackets
- Bilge blowers - (12V)

- Bilge pumps (4) - 1500 gph each, 3 automatic/manual operation, 1 automatic operation only
- Brass valves for all underwater thru-hulls
- CO detectors in salon and staterooms
- Compass - illuminated, dual-read
- Engine alarms - temperature and oil pressure
- Fire suppression system - automatic, FE241 (FM200 in European Community)
- Galvanic isolator/zinc saver
- Horn - air/electric (12V), trumpet
- Internal bonding system
- Molded nonskid surfaces on all walk decks
- Navigation lights (COLREGS)

BRIDGE

Command Bridge

- Beverage holders (13)
- Cabin top hatch - 23" x 18" weather-tight, lockable, with 2 friction shocks, provides access to salon

- Companion chair - swivel
- Electronics arch - custom aluminum with acrylic polyurethane surface coating and UV protection
- Electronics arch access plates (5) - corrosion-resistant polymer attached with noncorroding screws and water-proof sealant
- Grab rail - 17" stainless steel, across wet bar
- Lights (2) - courtesy, recessed
- Lounge - aft, accommodates 4 adults
- Lounge - port side, accommodates 3 adults, storage below
- Lounge - starboard side, accommodates 3 adults, storage below, cabin top hatch access below
- Self-draining walk surface
- Stereo speakers (2)
- Wet bar - self-draining with sink and 2 preparation surfaces
- Windshield - wraparound aluminum frame with opening side vents

Helm

- Adapter - 12V
- Beverage holders (2) - recessed, self-draining
- Helm seat - pedestal, adjustable, high-quality marine-grade upholstery, embroidery stitching, self-storing arms, mesh storage pocket on back
- Light - courtesy, recessed
- Tilt steering wheel

Instrumentation

- Gauge - synchronizer
- Gauges (1 set per engine) - oil pressure, engine temperature, engine battery voltage, fuel level, engine hours, tachometer
- Rocker switch controls

DECK

Side Decks

- Bow rail - 1.0" O.D., lineal-buffed, welded stainless steel, with additional intermediate rail forward
- Bow rail stanchions - double-welded (inside and outside), stainless steel, anchored to aluminum backing plates laminated into deck
- Cleats (2) - 10" spring, stainless steel, through-bolted through aluminum backing plate
- Deck toe rail

- Rub rail molding - heavy-duty, stainless steel insert

Fore Deck

- Access panel - behind lounge, provides access to helm wiring
- Beverage holders (2) - fold-out, mounted on either side of lounge
- Bow lockers - twin, self-draining for fender storage
- Cleat - 10" stainless steel for anchor line, through-bolted through aluminum backing plate
- Cleats (2) - 10" stainless steel, through-bolted through aluminum backing plate
- Lounge - double-wide, converts to sunpad

COCKPIT

- 29 ft² (approx.), integral to hull and deck
- Bolsters - padded, across transom
- Grab rails (2) - 17" stainless steel, on side deck stairways
- Hatch - engine room access, 22" x 57", guttered, watertight, supported by a gas shock
- Hatches (2) - engine room access, guttered, watertight
- Lights (4) - courtesy, recessed, with exterior-mounted switch
- Overhead sun/weather protection - extends aft 19" from cabin entrance door
- Side deck stairways (2) - integral to deck
- Transom door - fiberglass, stainless steel latch, padded top

ENGINE ROOM

- Bilges coated with white, low-VOC gelcoat
- Insulation - acoustical and thermal, vinyl vapor barrier

BOARDING PLATFORM

- 18 ft² (approx.), integral to hull and deck
- Boarding ladder - retractable, telescoping, with grab rail, inset in boarding platform
- Cleats (2) - 10" stainless steel, through-bolted through aluminum backing plate
- Lockers (2) - transom, self-draining, for stowing shore water hoses and shore power lines

SALON

- 110V outlets - GFCI protected
- AC and DC distribution panels

- Carpet - Gold Rush, tufted cut pile, 65 oz., crush-resistant, 100% nylon
- Command bridge ladder - stainless steel rails, stainless steel-reinforced cherry wood treads with nonskid laminate
- Designer décor
- Entertainment group - 20" TV and 12V stereo including AM/FM receiver, single CD player, and 2 speakers each in salon and on command bridge
- Entrance door - aluminum frame, sliding, handle lock, secures open and closed, with interior screen
- Fresh air fan (in lieu of optional air conditioning)
- Hardware highlights - brass/chrome
- Lights (2) - halogen, overhead, recessed
- Lights (2) - directable sconces
- Miniblinds - décor-matched
- Rocker light switch
- Sofa - L-shaped, Pecan Ultraleather
- Storage drawers (2) - under sofa
- Telephone connector

DINETTE

- 110V outlets (2) - GFCI protected
- Carpet - Gold Rush, tufted cut pile, 65 oz., crush-resistant, 100% nylon
- Designer décor
- Light - halogen, overhead, recessed
- Lounge - U-shaped, Pecan Ultraleather, converts to double berth
- Storage - beneath lounge
- Table - 50.5" x 24.5", trapezoidal, with raised edge

GALLEY

- 110V outlet - GFCI protected
- Chrome sink fixture
- Coffee maker
- Designer décor
- Flooring - wood plank
- Granite-style countertops
- Lights (2) - halogen, over counter, recessed
- Lights (2) - halogen, overhead, recessed
- Microwave oven - built-in
- Miniblinds - décor-matched
- Portlight - screened
- Range - electric, 2-burner, ceran top
- Refrigerator/freezer (upright)
- Rocker light switch
- Sink - countertop-matched
- Storage - under sink
- Storage drawers
- Storage cabinets

STATEROOM

- 110V outlet - GFCI protected
- Access panel - hinged, anchor chain locker
- Bedside endtable
- Berth - double, offset
- Bolster - padded, around head of berth
- Carpet - Gold Rush, tufted cut pile, 65 oz., crush-resistant, 100% nylon
- Designer décor
- Entrance door - secures open and closed, stainless steel hardware
- Hanging locker - 30.5" hanging bar, automatic light
- Lights (2) - directable reading sconces
- Lights (3) - halogen, overhead, recessed
- Overhead hatch - 19" x 19", lockable, inside screen, over berth
- Portlight covers - snap-on, décor-matched
- Portlights (2) - screened
- Rocker light switch
- Storage - under berth, with door
- Storage drawers (2) - in foot of berth
- Storage shelves (4) - with doors
- Telephone connector

HEAD

- 110V outlet - GFCI protected
- Chrome fixtures
- Entrance doors (2) - one to stateroom and one to galley, secure open and closed, stainless steel hardware
- Head fan
- Lights (2) - halogen, overhead, recessed
- Medicine cabinet - mirrored, 2 shelves
- Miniblinds - décor-matched
- Portlight - screened
- Rocker light switch
- Toilet - electric flush, pedestal
- Toilet paper holder - mounted under vanity
- Towel bar - 18"
- Vanity - granite-style countertop, integral sink, 2 shelves below with 2 doors

Shower Stall

- Entrance door - bi-fold, smoked acrylic in aluminum frame, secures open
- Grab rail - 45" aluminum
- Hand shower - chrome, retractable, wall-mounted holding bracket
- Integral bench seat
- Light - halogen, overhead, recessed
- Shower accessories shelves (3) - integral, with restraining rails



350 MARINER

OWNER PREFERENCE ITEMS

PROPULSION

- Fresh water cooling (available only with gasoline engines)

Gasoline Engines

- MerCruiser 350 Mag MPI
- MerCruiser 350 Mag MPI Horizon
- MerCruiser 6.2 MPI
- Volvo 5.7Gi
- Volvo 5.7GX

Diesel Engines

- Cummins 4B-250

MECHANICAL

- Engine oil change system
- Internal seawater strainers

ELECTRICAL

Generator

- Kohler 7.3 kW - gasoline
- Westerbeke 7.6 kW - diesel

30 Amp Shore Power Adaptor

- 1 adaptor
- 2 adaptors

WATER & WASTE SYSTEMS

- Waste tank overboard discharge with pump
- Fresh water tank level monitor
- Grey water holding system
- Hot and cold cockpit handshower
- Waste tank level monitor

Cockpit Washdown

- Both fresh and seawater
- Fresh water
- Seawater

Head

- Electric flush - fresh water
- Vacuum flush - with waste tank odor filter

SAFETY & NAVIGATION

- Maxwell Freedom 800 windlass with capstan, 35 lb. anchor, and 150 ft. of 5/16" chain
- Portable fire extinguisher
- Rudder angle indicator
- Single station spotlight

Spare Propellers and Shaft

- For gasoline engines
- For diesel engines

EXTERIOR AMENITIES

- Bridge cover
- Bridge table - swivel, storable
- Carpet
- Helm and seat covers
- Ice maker for wet bar

Canvas

- "Prestige" bimini top
- "Prestige" full canvas with carpet

Canvas Color

- Black Sunbrella
- White Sunbrella
- Captain's navy
- Toast

CABIN AMENITIES - SALON

- Air conditioning (16,000 BTU) with reverse cycle heat, dual shore power connectors
- Air conditioning upgrade (additional 5,000 BTU) - On/Off switch only

- Central vacuum system
- Coordinated Ultraleather color
- Décor package - 10-piece decorator pillow set, embroidered sheets and towels
- Pillow set - decorator, 6-piece
- Stereo - standard + remote-mounted 6 disc CD player
- VCR

Décor

- Oceania (blue) - with Starlight Blue or Savannah (neutral) countertops
- Bahama (green) - with Savannah or Black countertops
- Dynasty (black) - with Black or Savannah countertops

CABIN AMENITIES - GALLEY

Stove

- 2-Burner electric with oven
- 2-Burner propane with oven and LPG locker assembly

MISCELLANEOUS

- Shipping cradle
- Shrink wrap
- Loading charge

CARVER[®]
YACHTS

Carver Boat Corporation • P. O. Box 1010 • Pulaski, WI 54162-1010 • 920-822-3214
www.carveryachts.com

Carver Boat Corporation reserves the right to change price, colors, materials, equipment specifications or models without notice. Models may be discontinued without obligation to previous purchasers. Illustrations may include optional equipment. Some electrical equipment is only offered in 120V/60Hz; check with your Carver dealer for availability outside the U.S.

MY 2002