





380 SANTEGO SE



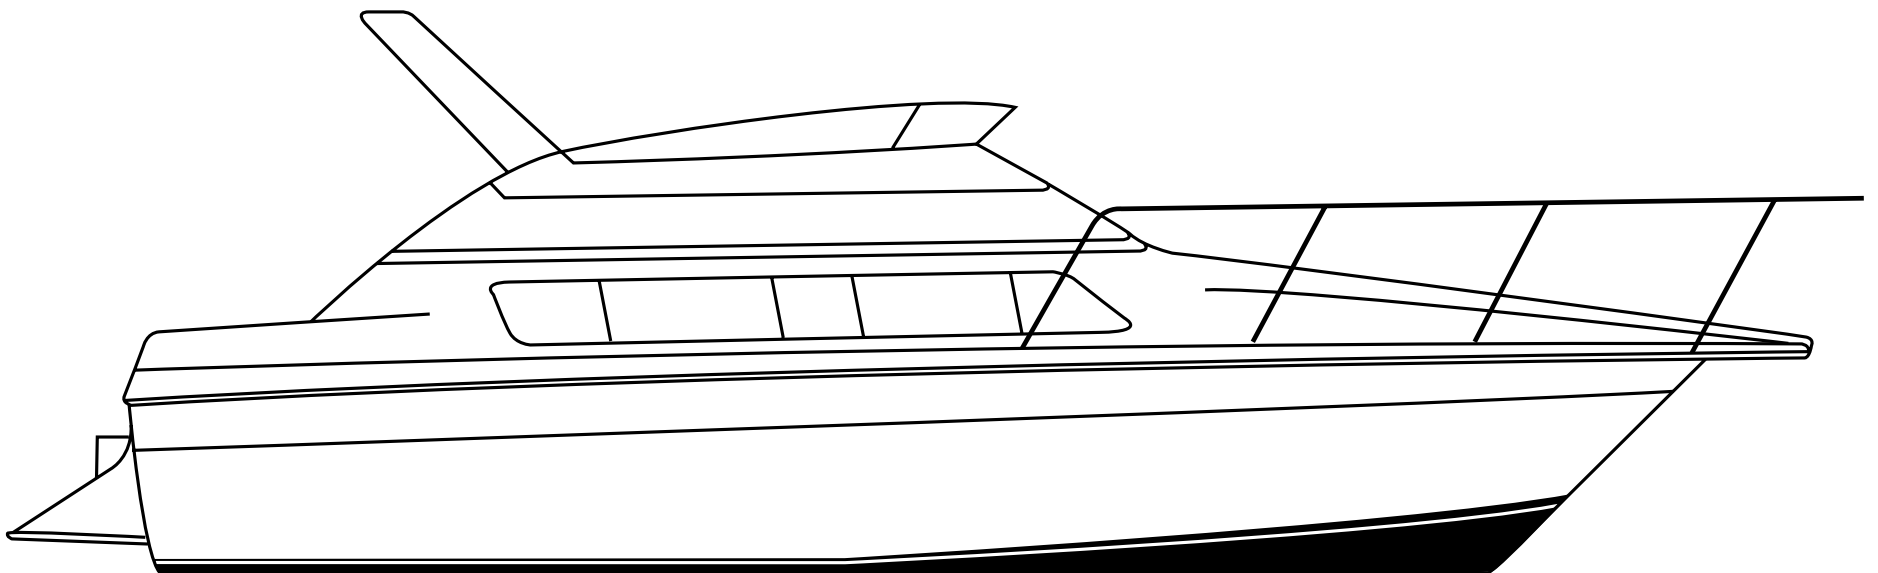

380 SANTEGO SE

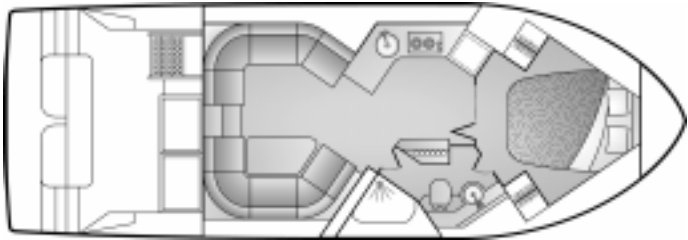

LOA (w/platform)	41'8"	12,70 m
Beam	13'2"	4,01 m
Draft	40"	1,02 m
Bridge Clearance w/arch	14'8"	4,47 m
Weight (w/fuel & water)	19,300 lbs.	8754,48 kg
Water System	90 U.S. gals.	340,69 liters
Waste System	37 U.S. gals.	140,06 liters
Fuel System	216 U.S. gals.	817,65 liters
Twin V-drive inboards (gas or diesel)		
Cabin Headroom	6'4"	1,93 m
Sleeps	4 (6 optional)	

STANDARD FEATURES

CONSTRUCTION

- Structural engine mountings - reinforced stringer mountings with gusseted, angle steel plates
- Hand-laid, molded fiberglass components featuring composite laminate hullsides, decks, and cabintops
- Molded fiberglass stringer system
- Cherry wood cabinetry and trim throughout cabin, with high-gloss finish
- Solid fiberglass hull bottoms with Knytex substrates and Vinylester barrier coat
- Tinted, tempered safety glass frameless window systems
- Unitized deck and cabintop construction

MECHANICAL

- Air conditioning system - reverse heat cycle, 2 units, 23,000 BTU total
- Dripless shaft logs

- Exhaust mufflers - engines
- Fuel tanks - welded, baffled 5052 aluminum
- Hydraulic steering
- Propellers - manufacturer-certified
- Propeller shafts - aquamet
- Rudders - 421 manganese bronze
- Seawater cooling - engines
- Cutlass bearings - synthetic rubber composite
- Struts - 421 manganese bronze
- Trim tabs - stainless steel, hydraulic

ELECTRICAL

- AC/DC distribution panels with magnetic circuit breakers and integral bilge blower controls; AC and DC voltmeters; AC and DC ammeters
- Batteries (2) - deep cycle, marine (12V)
- Battery charger - electronic, AC-DC converter
- External connectors - CATV, telephone
- Ground Fault Circuit Interrupt (GFCI) protection - all 110V outlets

- Shore power connectors (2) - 30 amp
- Shore power cords (2) - 50 ft.
- Wiring system - tinned copper strand wire, harnessed, color-coded, labeled, meets or exceeds ABYC standards

WATER & WASTE SYSTEMS

- Fresh water system - pressurized (12V), with large-capacity filter
- Fresh water storage tanks (2) - polyethylene
- Shore water connection with pressure-reduction valve
- Shower sump pump - automatic operation
- Water and waste lines - constructed of molecularly cross-linked polyethylene
- Waste holding tank - with dockside pumpout
- Water heater - 11 gallons (110V)

SAFETY & NAVIGATION

- Anodes - zinc, sacrificial
- Battery selector switch

- Battery restraint boxes and straps
- Bilge blowers - (12V)
- Bilge pumps (2) - 1500 gph each, automatic/manual operation
- Brass valves for all underwater thru-hulls
- CO detector in salon and stateroom
- Compass - illuminated, dual-read
- Engine alarms - temperature and oil pressure
- Fire suppression system - automatic, FE241 (FM200 in European Community)
- Galvanic isolator/zinc saver
- Horn - air/electric (12V), trumpet
- Internal bonding system
- Molded nonskid surfaces on all walk decks
- Navigation lights (COLREGS)

BRIDGE

Command Bridge

- Access panels (2) - behind forward lounge, provide access to helm wiring
- Canvas - full, black Sunbrella

- Carpet - outdoor
- Electronics arch - custom aluminum with acrylic polyurethane surface coating and UV protection
- Electronics arch access plates (3) - corrosion-resistant polymer attached with noncorroding screws and water-proof sealant
- Lights (3) - courtesy, recessed
- Lockers (2) - forward bulkhead
- Lounge - forward, double-wide
- Lounge - port side, accommodates 3 adults, storage beneath
- Lounge - starboard side, accommodates 3 adult, storage beneath
- Self-draining walk surface
- Stereo speakers (2)
- Windshield - venturi-style, wraparound aluminum frame

Fore Deck Companionway

- Access from center of command bridge to foredeck
- Grab rails (2) - 28" stainless steel, on either side of companionway
- Lights (2) - courtesy, recessed

Helm

- Access panels (2) - below helm, provide access to helm wiring
- Adapter - 12V
- Beverage holders (2) - recessed, self-draining
- Carpet - exterior
- Companion seat - double wide
- Helm seat - adjustable, double-wide, high-quality marine-grade upholstery, embroidery stitching
- Tilt steering wheel

Instrumentation

- Gauges - synchronizer, fuel level
- Gauges (1 set per engine) - oil pressure, engine temperature, engine battery voltage, engine hourmeter, tachometer
- Toggle switch controls

DECK

Side Decks

- Cleats (4) - 10" spring, stainless steel, through-bolted through aluminum backing plate
- Grab rails (2) - 132" stainless steel, above cabin windows
- Rub rail molding - heavy-duty, stainless steel insert

Fore Deck

- Bow rail - 1.0" O.D., lineal-buffed, welded stainless steel, with additional intermediate rail forward
- Bow rail stanchions - double-welded (inside and outside), stainless steel, anchored to aluminum backing plates laminated into deck
- Cleat - 12" stainless steel for anchor line, through-bolted through aluminum backing plate
- Cleats (2) - 12" stainless steel, through-bolted through aluminum backing plate
- Pulpit with anchor roller and stainless steel hawse pipe

COCKPIT

- 43 ft² (approx.), integral to hull and deck
- 110V outlet - GFCI protected
- Carpet - exterior
- Cleats (2) - 12" stainless steel, through-bolted through aluminum backing plate
- Command bridge ladder - stainless steel rails, stainless steel-reinforced vinyl rungs with nonskid surface
- DC distribution panel - 12V safety systems
- Grab rails (2) - 26" stainless steel, on side deck stairways
- Hatches (3) - engine room access, 57" x 30.5", guttered
- Lights (2) - courtesy, recessed, with exterior-mounted switch
- Lockers (2) - outboard, self-draining, for stowing shore power lines
- Safety cables (2) - at top of each cockpit stairway
- Side deck stairways (2) - integral to deck

ENGINE ROOM

- Bilges coated with white, low-VOC gelcoat
- Insulation - acoustical and thermal, vinyl vapor barrier
- Light

BOARDING PLATFORM

- 19 ft² (approx.)
- Boarding ladder - retractable, telescoping, concealed under boarding platform, with grab rail mounted on boarding platform
- Cockpit stairways (2) - integral
- Fuel fittings - port and starboard transom
- Hand rails (2) - stainless steel, one for each cockpit stairway
- Lockers (2) - transom, self-draining

SALON/DINETTE

- 110V outlets (2) - GFCI protected
- AC and DC distribution panels
- Carpet - Gold Rush, tufted cut pile, 65 oz., crush-resistant, 100% nylon
- Designer décor
- Designer curtains - décor-matched
- Designer privacy curtain - décor-matched, self-storing, closes across dinette lounge
- Entertainment group - TV/VCR and 12V stereo including AM/FM receiver, single CD player, and 2 speakers each in salon/dinette, stateroom, and on command bridge
- Entrance door - tinted glass in aluminum frame, sliding, handle lock, also secures open, with interior screen
- Lights (7) - halogen, overhead, recessed
- Lounges (2) - U-shaped, Pecan Ultraleather, dinette lounge converts to berth
- Miniblinds - décor-matched
- Mirrored bulkhead - forward starboard side
- Padded bulkheads
- Rocker light switch
- Rotary dimmer light switches (2) - for lights over lounges
- Storage - beneath and behind lounges
- Table - 43.5" x 18.5", trapezoidal, with raised edge
- Telephone connector

GALLEY

- 110V outlets (4) - GFCI protected
- Carpet - Gold Rush, tufted cut pile, 65 oz., crush-resistant, 100% nylon
- Chrome sink fixtures
- Coffee maker
- Designer décor
- Lights (3) - halogen, overhead, recessed
- Microwave oven - built-in, turntable
- Miniblinds - décor-matched
- Padded bulkheads
- Range - electric, 2-burner, ceran top
- Refrigerator/freezer (upright)
- Rocker light switch
- Sink - stainless steel
- Storage - under sink
- Storage drawers
- Storage cabinets
- Wet bar - self-draining with sink, water dispenser, bottle and glass storage

STATEROOM

- 110V outlets (2) - GFCI protected
- Access panel - anchor chain locker
- Bedside countertops
- Berth - double, island
- Bolster - padded, on sides of berth
- Carpet - Gold Rush, tufted cut pile, 65 oz., crush-resistant, 100% nylon
- CATV connector
- Designer décor
- Entrance door - bi-fold, secures open and closed, stainless steel hardware
- Hanging lockers (2) - 20.5" and 14.5" hanging bars, automatic light
- Lights (2) - directable reading, recessed
- Lights (2) - halogen, overhead, recessed
- Overhead hatch - 20" x 20", lockable, inside screen, over berth
- Padded bulkheads
- Rocker light switch
- Stereo speakers (2) - with wall-mounted rotary volume control
- Storage - beneath berth
- Storage drawers (4) - in foot of berth
- Telephone connector

HEAD

- 110V outlet - GFCI protected
- Chrome sink fixtures
- Designer curtains - décor-matched
- Entrance doors (2) - one to stateroom and one to salon/dinette, secure open and closed, stainless steel hardware
- Head fan
- Light - overhead, recessed
- Medicine cabinet - 2 mirrored doors, 2 shelves
- Rocker light switches
- Toilet - electric flush, pedestal
- Toilet paper holder - mounted inside vanity
- Towel bars (2) - 18"
- Vanity - laminate surface, stainless steel sink, 2 doors and storage below

Shower Stall

- Designer curtains - décor-matched
- Entrance door - acrylic in aluminum frame, full-length hinge, secures closed
- Integral seat
- Light - overhead, recessed
- Shower accessories shelf - integral, self-draining
- Shower head - detachable for use as a hand shower



380 SANTEGO SE

OWNER PREFERENCE ITEMS

PROPULSION

- Fresh water cooling (available only with gasoline engines)

Gasoline Engines

- Crusader 8.1 MPI
- MerCruiser MX 6.2 MPI
- MerCruiser 8.1 S Horizon
- Volvo 5.7GXi
- Volvo 8.1Gi

Diesel Engines

- Cummins 330B
- Volvo TAMD 63P

MECHANICAL

- Engine oil change system
- Internal seawater strainers

ELECTRICAL

Generator

- Kohler 7.3 kW - gasoline
- Onan 9.0 kW - diesel

30 Amp Shore Power Adaptor

- 1 adaptor
- 2 adaptors

WATER & WASTE SYSTEMS

- Fresh water tank level monitor
- Grey water holding system
- Hot and cold cockpit handshower
- Waste tank level monitor
- Waste tank overboard discharge with pump

Cockpit Washdown

- Both fresh and seawater
- Fresh water
- Seawater

Head

- Electric flush - fresh water
- Vacuum flush - with waste tank odor filter

SAFETY & NAVIGATION

- Maxwell Freedom 800 windlass with capstan, 35 lb. anchor, and 150 ft. of 5/16" chain
- Portable fire extinguisher
- Rudder angle indicator
- Single station spotlight

Spare Propellers and Shaft

- For gasoline engines
- For diesel engines

EXTERIOR AMENITIES

- Helm and seat covers
- Foredeck sunpad

CABIN AMENITIES - SALON

- Coordinated Ultraleather color
- Décor package - 10-piece decorator pillow set, embroidered sheets and towels

- Filler cushion for port salon lounge
- Pillow set - decorator, 6-piece
- Stereo - standard + remote-mounted 6 disc CD player
- Table - for port salon, with cushion

Décor

- Oceania (blue) - with Savannah (neutral) countertops
- Bahama (green) - with Savannah countertops
- Dynasty (black) - with Savannah countertops

CABIN AMENITIES - GALLEY

- Ice maker

MISCELLANEOUS

- Shipping cradle
- Shrink wrap
- Loading charge

CARVER
YACHTS

Carver Boat Corporation • P. O. Box 1010 • Pulaski, WI 54162-1010 • 920-822-3214
www.carveryachts.com

Carver Boat Corporation reserves the right to change price, colors, materials, equipment specifications or models without notice.
Models may be discontinued without obligation to previous purchasers. Illustrations may include optional equipment.
Some electrical equipment is only offered in 120V/60Hz; check with your Carver dealer for availability outside the U.S.

MY 2002